




LABORATORY SECTOR

SPECTROPHOTOMETER



Kalstein®

A different accompaniment, at your service

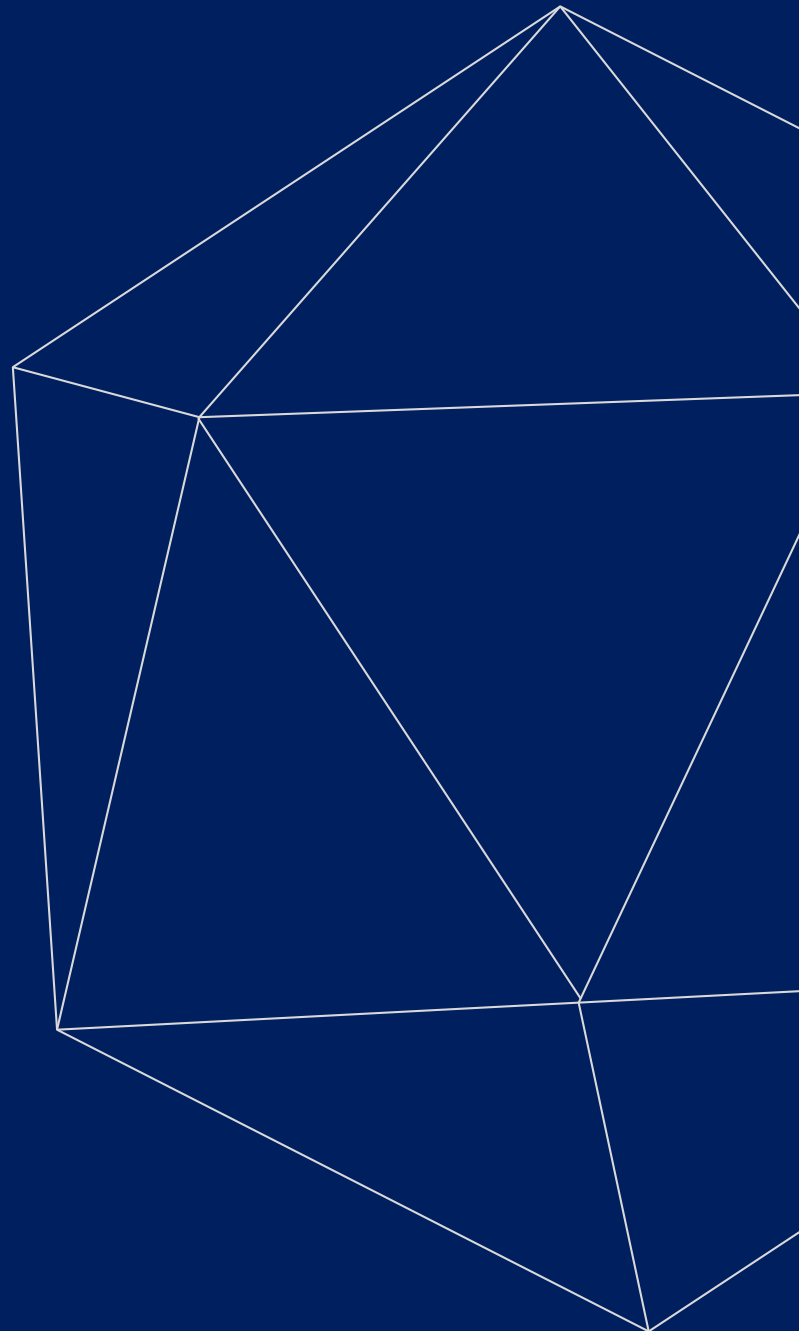



Kalstein®

A different accompaniment, at your service

OUR SERVICES

Benefits and Support

In Kalstein France, we take care of the full satisfaction of our customers, that is why we provide value-added services of the highest level based on our experience.



Online Inductions and Trainings

In any part of the world, receive your induction or training from our specialized team of engineers



Quick Response

Our work team is always available to response all your consults or questions, in order to support you in any situation.



#Letsgivemore

Thanks to your purchase, a donation will be made to a non-profit foundation that fights against breast cancer and helps most vulnerable communities.



Technical Support

Enjoy of personalized advice for the correct preventive and corrective maintenance of your equipment, thanks to Kalstein's manuals and articles, special catalogues and video tutorials.



Delivery Logistics

We take care of all the necessary logistics for the dispatch of your goods, whether is by sea, land or air.



Kalstein Worldwide

With more than 25 years growing with our customers, Kalstein's multiformat and modern content, is now present in more than 10 countries and increasing.



KALSTEIN® Spectrophotometer
Benchtop Spectrophotometer
Model YR05476



#Letsgivemore ♥

Thanks to your purchase, a donation will be made to a non-profit foundation that fights against breast cancer and helps most vulnerable communities.



All rights reserved © KALSTEIN France S. A. S.,
2 Rue Jean Lantier • 75001 Paris •
+33 1 78 95 87 89 / +33 6 80 76 07 10 •
<https://kalstein.eu>
KALSTEIN FRANCE, S. A. S.



KALSTEIN® Spectrophotometer

Benchtop Spectrophotometer

Model YR05476



Product Description:


YR05476 is a benchtop grating spectrophotometer which is developed by Kalstein independently with independent intellectual property. YR05476 has many features, like 7 inches TFT capacitive touch screen display, full illuminants, reflective d/8 and transmissive d/0 geometry (including or excluding UV). With very stable and precise color measurement, large storage and powerful PC software all makes YR05476 ideal for color analysis within R&D and laboratory environments. YR05476 spectrophotometer is a bench-top measurement instrument designed to evaluate the color and appearance of many measuring applications for objects' reflectance and also the transmittance of translucent or transparent liquids and solids. It is a compact yet advanced instrument that features a side port in horizontal format and with 7.7 inch TFT touch screen, it's very easy to operate. With high-precision capabilities and great reliability, YR05476 benchtop spectrophotometer allows users to effectively analyze, formulate, and control the color and appearance of solids, liquids, pastes, powders, pills, and granules in a more comprehensive, streamlined

Features:

- ✓ High configuration of hardware: 7 inches TFT Color Capacitive Touch-screen Display; Bluetooth 2.1; Concave Grating.
- ✓ Double Array 256 Image Element CMOS Sensor; Long life-span stable xenon lamp.
- ✓ With reflective and transmissive spectrum, accurate Lab value, good to calculate color formula and do precise color transmission.
- ✓ Auto identify measuring aperture. Freely switchable between 3 measuring apertures: Φ 25.4mm/8mm/4mm. Users also can customize apertures.
- ✓ Built-in temperature sensor to monitor and compensate the measuring temperature to ensure the measurement more precision.
- ✓ Wavelength range 360nm – 780nm. Built-in 400nm/420nm/460nm cut off Xenon lamp, more professional in UV measurement.
- ✓ Independent light source detector, continuously monitor the condition of light sources to ensure the light source reliable.
- ✓ Multiple measurement modes: Quality Management Mode, Sample Mode; Meet more users' requirement.
- ✓ Multiple accessories, sample holders, fixation clamp, suitable to more working condition
- ✓ Big capacity data storage, for 20000 pieces test result.
- ✓ Built-in camera locating.
- ✓ More powerful extended functions at the PC software.

Application Industry

YR05475 benchtop spectrophotometer is used to do precise color analysis and transmission in laboratories. It can be widely applied in different industries, such as plastics, electronics, paint and ink, printing, garments, leather, paper, auto, medical, cosmetics, food, science institutes, laboratories.

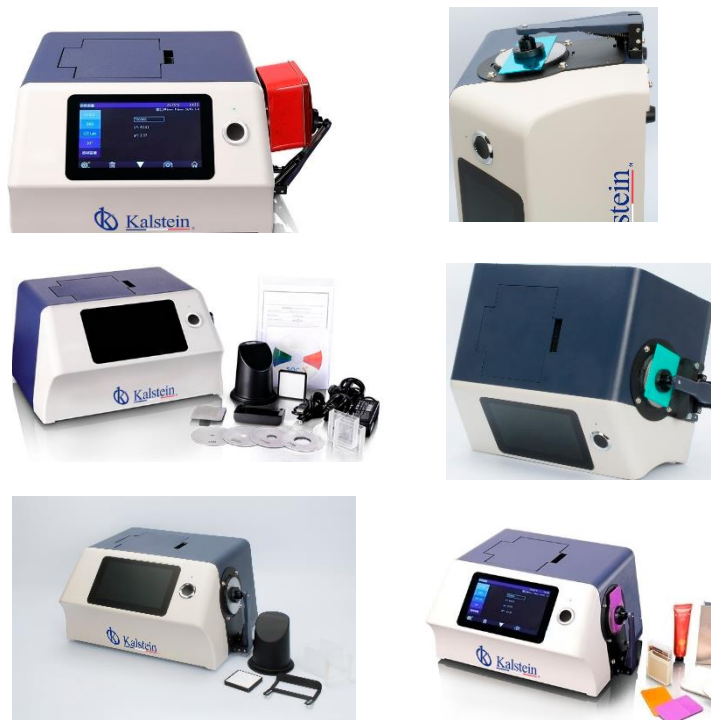

#Letsgivemore

Thanks to your purchase, a donation will be made to a non-profit foundation that fights against breast cancer and helps most vulnerable communities.



All rights reserved © KALSTEIN France S. A. S.,
2 Rue Jean Lantier • 75001 Paris •
+33 1 78 95 87 89 / +33 6 80 76 07 10 •
<https://kalstein.eu>
KALSTEIN FRANCE, S. A. S



KALSTEIN® Spectrophotometer

Benchtop Spectrophotometer

Model YR05476



Model	YR05476
Optical Geometry	Reflectance: d/8 (SCI&SCE; Include UV/Exclude UV)
	Transmittance: d/0 (SCI&SCE; Include UV/Exclude UV); Haze(ASTM D1003)
	Conforms to CIE No.15, GB/T 3978, GB 2893, GB/T 18833, ISO7724/1, ASTM E1164, DIN5033 Teil7
Integrating Sphere Size	Φ 154mm
Light Source Device	360nm-780nm Xenon Lamp, 400nm cut-off Xenon Lamp,420nm cut-off Xenon Lamp,460nm cut-off Xenon Lamp
Spectrophotometric Mode	Concave Grating
Sensor	256 Image Element Double Array CMOS Image Sensor
Wavelength Range	360-780nm
Wavelength Pitch	10nm
Semiband Width	5nm
Reflectance Range	0~200%
Measuring Aperture	Reflective : Φ30mm/Φ25.4mm, Φ18mm/Φ15mm, Φ10mm/Φ8mm, Φ6mm/Φ4mm;
	Transmissive : Φ30mm/Φ25mm;Remark: 1. Automatic identification of switch caliber 2. Customized Configuration caliber and lens position
Specular Component	Reflectance: SCI&SCE
	Transmittance: SCI&SCE
Color Space	CIE Lab, XYZ, Yxy, LCh, CIE LUV, Hunter LAB, Munsell, s-RGB, HunterLab, DIN, βxy
Color Difference Formula	ΔE^*ab , ΔE^*uv , ΔE^*94 , $\Delta E^*cmc(2:1)$, $\Delta E^*cmc(1:1)$, ΔE^*00v , ΔE (Hunter), DIN $\Delta E99$
Colorimetric Index	WI (ASTM E313, CIE/ISO, AATCC, Hunter),
	YI (ASTM D1925, ASTM 313),
	MI (Metamerism Index),
	Staining Fastness, Color Fastness, Color Strength, Opacity, Gardner Index, Pt-Co Index, 555 Index, Haze(ASTM D1003)
Observer Angle	2° & 10°
Illuminants	D65, A, C, UV, D50, D55, D75, F1, F2, F3, F4, F5, F6, F7, F8, F9, F10, F11, F12
Displayed Data	Spectrogram/Values, Chromaticity Values, Color Difference Values/Graph, Pass/Fail Result, Color Offset
Measuring Time	About 2.4s (Measure SCI & SCE about 5s)
Repeatability	Spectral reflectance: Φ25.4mm/SCI, Standard deviation within 0.06% (400 nm to 700 nm: within 0.05%)
	Chromaticity value: Φ25.4mm/SCI, Standard deviation within ΔE^*ab 0.012 (When a white calibration plate is measured 30 times at 5 second intervals after white calibration)
	Spectral Transmittance: Φ25.4mm/SCI, Standard deviation within 0.06% (400 nm to 700 nm: within 0.06%)
	Chromaticity value: Φ25.4mm/SCI, Standard deviation within ΔE^*ab 0.015 (When a white calibration plate is measured 30 times at 5 second intervals after white calibration)



#Letsgivingmore

Thanks to your purchase, a donation will be made to a non-profit foundation that fights against breast cancer and helps most vulnerable communities.



All rights reserved © KALSTEIN France S. A. S.,
2 Rue Jean Lantier • 75001 Paris •
+33 1 78 95 87 89 / +33 6 80 76 07 10 •
<https://kalstein.eu>
KALSTEIN FRANCE, S. A. S



KALSTEIN® Spectrophotometer Benchtop Spectrophotometer Model YR05476



Inter-instrument Error	Φ25.4mm/SCI, Within ΔE*ab 0.12 (Average for 12 BCRA Series II color tiles)
Size	370×300×200mm
Weight	About 9.6kg
Power Supply	DC 24V, 3A Power Adapter
Light Source Device Life	5 years, more than 3 million times measurements.
Display	7" TFT Capacitive Screen-touch Display
Data Port	USB & Bluetooth & Print serial port
Data Storage	Standard 5000 Pcs, Sample 40000 Pcs
Language	Simplified Chinese, Traditional Chinese, English, (Optional Customized German, French and Spanish)
Working Environment	Temperature: 0~40°C; Humidity: 0~85% (No Condensation)
Storage Environment	Temperature: -20~50°C; Humidity: 0~85% (No Condensation)
Standard Accessory	Power Adapter, User Guide, CD Disk(PC Software), USB cable, Standard Calibration Board, Black Calibration Cavity, Transmission black baffle, Sample holder, 25.4 caliber, 15 caliber, 8 caliber, 4 caliber, Transmissive Test Component
Optional Accessory	Micro-printer, Micro Aperture(4mm) transmission test clamp component, Instrument inversion components
Notes: The specifications are subject to change without notice.	



#Letsgivemore ♥

Thanks to your purchase, a donation will be made to a non-profit foundation that fights against breast cancer and helps most vulnerable communities.



All rights reserved © KALSTEIN France S. A. S.,
2 Rue Jean Lantier • 75001 Paris •
+33 1 78 95 87 89 / +33 6 80 76 07 10 •
<https://kalstein.eu>
KALSTEIN FRANCE, S. A. S





 **Kalstein**[®]
A different accompaniment, at your service

#LETSGIVEMORE 

**WITH THE
ACQUISITION
OF A KALSTEIN
EQUIPMENT**

YOU MAKE A CONTRIBUTION TO:



**Fundación
Jacinto Convit**

<https://www.jacintoconvit.org/>



<https://onetreepanted.org>



Humatem

Solidarité et coopération
biomédicale


<https://www.humatem.org/>



**MANIAPURE
FOUNDATION USA**

<https://www.maniapurefoundation.org/>

Articles Kalstein
(Social Networks and Official Websites)

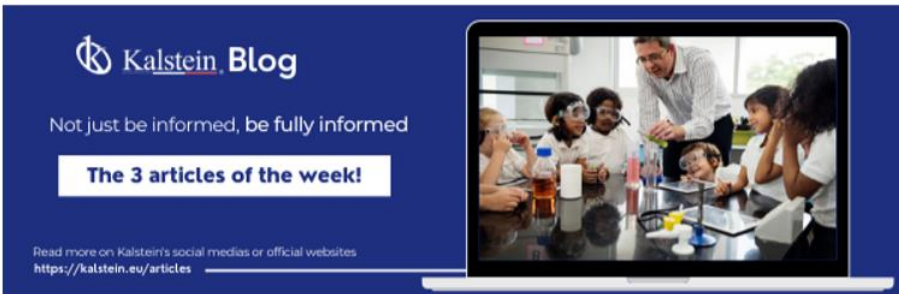

Kalstein Blog
Not just be informed, be fully informed
The 3 articles of the week!
Read more on Kalstein's social medias or official websites
<https://kalstein.eu/articles>



1
Read this ARTICLE NOW
How does the climate affect your microscope?
microscope is an instrument that uses a series of lenses to magnify images of small objects. This is a very sensitive device that requires a controlled environment to maintain its performance.
Kalstein Blog
Article of the week:
How does the climate affect your microscope?
Read more on Kalstein's social medias or official websites
<https://kalstein.eu/articles>



2
Read this ARTICLE NOW
What is the importance of the laboratory refrigerator?
Refrigerator is a piece of laboratory equipment that is used to maintain a controlled environment (refrigerated space), without frost and humidity.
Kalstein Blog
Article of the week:
What is the importance of the laboratory refrigerator?
Read more on Kalstein's social medias or official websites
<https://kalstein.eu/articles>

Kalstein Training Videos
(Youtube Channel and Official Websites)



Kalstein France - Jacinto Convit Foundation / Allianc...

23 views • 3 years ago



Kalstein's Microscopes

445 views • 1 week ago



PARIS - FRANCE
HEADQUARTER

2 Rue Jean Lantier
75001 Paris - France

Tlf: +33 (0) 01 78 95 87 89

Cel: +33 (0) 6 80 76 07 10

sales@kalstein.eu

<https://kalstein.eu/>
<https://www.kalstein.fr/>

